



# CCP Extreme Sealing Tape 2510


## Super Sealing Tape

Product Information 01.2021

1/2

### Extreme Sealing Tape

CCP's Extreme Sealing Tape is a single sided high performance acrylic based adhesive tape. This tape is especially designed for difficult sealing applications. The ionomer backing on this extreme sealing tape is very tough, flexible, abrasion resistant and paintable. What makes it easy to use this tape in all different kind of products. This single-sided tape is neutral translucent and especially designed to seal an existing joint or seam. The adhesive has been designed so that overlapping tape joints can be made while maintaining a strong seal. In combination with a primer, this Action Tape family guarantees excellent adhesion performance even on low surface energy substrates.

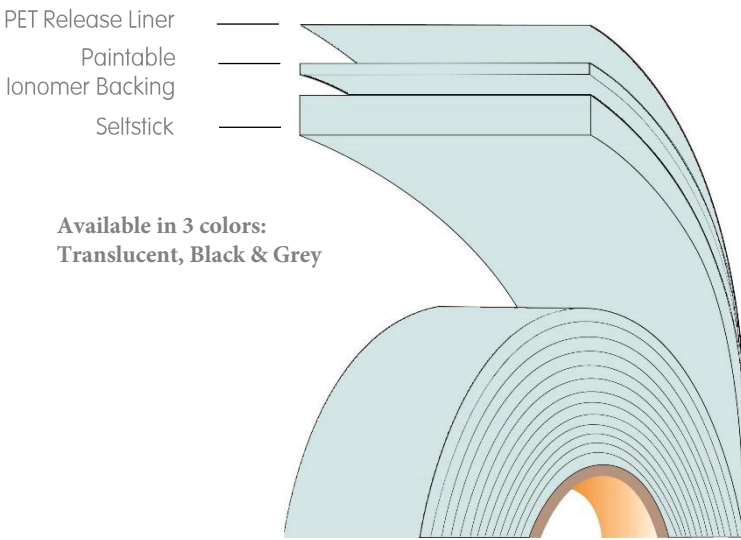

Thickness:	1,0 mm (0.039 inch) ±10%
Core:	Closed cell acrylic
Adhesive:	Closed cell acrylic
Density:	900 kg/m <sup>3</sup> (lb/ft <sup>3</sup> )
Color:	Transparent, Black, Grey
Liner:	PET Release Liner
Temperature Resistance:	
Minimum	-40°C (-40°F)
Maximum	95°C (°F)

90° Peel Adhesion (Based on ASTM D-3330; various substrates, 72 hour room temp with CCP Action Tape M1008HC to attach aluminum peel strip backing; adhesion promoter or primer used on substrates)	N/10mm (lb/in)	64 (6)	ASTM D3330
Tensile Strength	kPa (lb/in <sup>2</sup> )	310 (45)	ASTM D3759

#### Suitable for:

- The tape is and remains soft and flexible, making it easy to mold to contours, edges, rivets, screws used for motorhome leaks, roof and gutter holes/tears, and the transportation industry.

#### Available sizes:

- jumbo: 900mm x 330 m (76,2mm core)
- log: 900mm x 33/66 m (76,2mm core)
- slit roll: 4 – 250mm x 33/66 m (76,2mm core)
- spool roll: 5 – 25mm x max 1000 m (152,4mm core)



# CCP Extreme Sealing Tape 2510

## Super Sealing Tape

### Product Information 01.2021

Surface	Tape bonding is one of the most variable and easy technologies mating substrates. Especially for assemblies made of different substrates having different thermal expansion rates. Bonding is an easy method for a long term joint. CCP tapes allow a high variation in such substrates as all are available in different thicknesses. To ensure proper performance of such bonded parts, see the following recommendations.
Design	A proper tape bond design means avoiding cleavage and peel forces. Design leading to pure shear and tensile loads have to be preferred to utilize full CCP Action Tape performance.
Surface Preparation	All bonding processes require proper surface preparation and cleaning. This will enable CCP Action Tapes to get in direct contact with the surface creating full adhesion force. CCP Action Clean Dirt & Dust will remove most (polar) contaminations such as fingerprints and light oil. CCP Action Clean Oil & Grease is used for more non-polar contaminations as grease mold release agents. Check suitable cleaner with surface test inks. Use lint-free tissues for such operations.
Surface Modification	If simple cleaning cannot achieve appropriate adhesion forces the following surface modifications can be used. For larger scale process operations, the use of e.g. flame activation can be used. On smaller scale repair operations, the use of CCP Action Prime or CCP Action Activate might be a solution. CCP Action Prime 10 (UV) is used for plastics or similar coatings which have a low surface energy. For glass, CCP Action Prime 201 is used when exposed to humid environments. CCP Action Activate 301 is a solution used for a variety of car paints. All primer/activators should only be used on the area for bonding. Excess material needs to be cleaned immediately. For mill finished aluminum or stainless steel, CCP Action Pads can be used to create light abrasions followed up by cleaning with CCP Action Clean Dirt & Dust.
Temperature	After proper surface preparation, CCP Action Tapes should be applied at a temperature level above 65° F (18° C). For temperatures below this but above 32° F, use CCP low temperature Action Tapes.
Pressure	Ensure immediate part assembly after linear removal. Pressure should be applied in rolling fashion at approximately 10N/cm2. Recommended roller speed at 24 in/s (10 mm/s). Higher v speeds might require higher pressure or control with surface pressure films. CCP Action Tapes reach full strength after 24 hours at ambient temperature. Higher temperatures can accelerate strength development.
Storage & Shelf Life	Store CCP Action Tapes between 40°-95° F (5°-35° C). Humid conditions should be avoided. For products with non-siliconized liners, shelf life is 24 months; products with siliconized liners and CCP splice/tapping have a shelf life of 12 months.
Disclaimer	All technical data in this data sheet are based on CCP's experience and external testing. These values are representative for the overall performance. These data sheets are NOT to be used for specification purposes or for your own specific application. It is your responsibility to test whether the tape is suitable for your application or project. CCP will not be held liable for any information provided on this data sheet. Please follow the rules and regulations that are applicable in the state, county or country where CCP products are being used. If you have any questions regarding the use of the CCP Action Tape acrylic foam tapes, please contact your sales rep. Please review all documents that should have been agreed to in writing prior to the sale between CCP and the customer. Action Tape is a brand name of CCP.